

DATA TRANSMISSION ANALYZER

MD6420A

50 bit/s to 10 Mbit/s

GPIB  
OPTION

For Evaluating the Quality of Digital Data Networks



3

Bit error rate measurement is the most critical parameter in evaluating the quality of digital transmission modes. However, conventional methods, which measure only average bit error rates, are inadequate. In the MD6420A, various types of extension and remote control units are provided as options, as well as units which allow the use of various types of interfaces.

The measuring conditions can be stored in memory and recalled prior to measurement with the touch of a single key. In addition, the analyzer is portable so that it can be used on site for maintenance operations.

Features

- Can measure a variety of devices from low-speed modems to high-speed digital lines

Can be configured to a variety of communications protocols via ITU-T V, X, G, and I series by using plug-in units. Can perform high-quality evaluations of data communications systems that have bit rates from 50 bit/s to 10 Mbit/s.

- Simultaneous error measurement of various error parameters

The error count (bit error, parity error, and CRC error, etc.) error rate, block error count, block error rate, US, %US, SES, %SES, DM, %DM, ES, %ES, EFS, %EFS, AT, %AT, BBER, clock slip, and synchronization loss can be measured, Alarm states such as AIS can be continuously monitored\*.

\*: Conforms to ITU-T G.821


- Data will not be lost if a power failure occurs during measurement

If an AC power failure occurs during error rate measurements, all data obtained prior to the failure is recalled from memory and the measurement is automatically continued when the power is resupplied. When the power returns, the time at which power failure occurred is displayed on the EL display.

Example of display screen

- Overall display of error measurements

Up to 22 measurement items can be monitored simultaneously. If a power failure occurs during measurements then measurements will be continued from the time at which the power is resupplied. The failure time (PWL) will be displayed when power is resupplied.

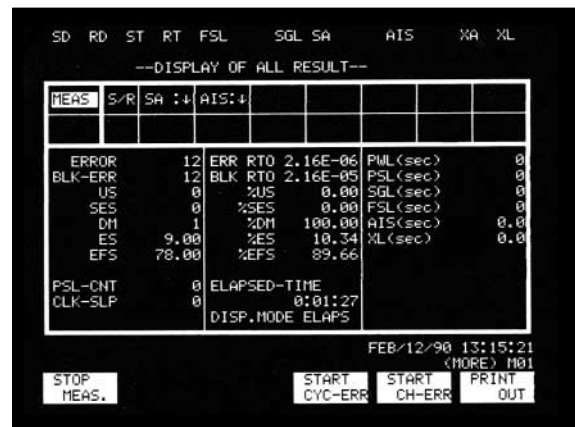

Combinations of interface and extension units

The MD6420A can be combined with many plug-in units to perform a variety of measurement.

Interface units	Extension units	
		MD0627A Analog
MD0621A V.24/V.28 (RS232C)		√
MD0621B V.35		√
MD0621C V.36 (RS-449)		√
MD0621D X.20 (RS-423)/X.21 (RS-422)		√
MD0622B G.703/G.704 1.544 Mb/s Bipolar		√*
MD0622D G.703/G.704 6.312 Mb/s Bipolar		√*
MD0622E G.703 64 kb/s		√*
MD0625B I.431 1.544 Mb/s		√*
MD0626A TTL		√*

\*: Except DC voltage measurement

## Interface units

### • V/X series

MD0621A	V.24/V.28 (RS-232C)
MD0621B	V.35
MD0621C	V.36 (RS-449)
MD0621D	X.20 (RS-423)/X.21 (RS-422)

### • G.703

MD0622B	G.703/G.704 1.544 Mb/s Bipolar
MD0622D	G.703/G.704 6.312 Mb/s Bipolar
MD0622E	G.703 64 kb/s

### • I.431

MD0625B	I.431 1.544Mb/s
---------	-----------------

### • TTL

MD0626A	TTL
---------	-----

### Extension units

#### • Analog

MD0627A	Analog
---------	--------

### Remote control units

MD0620A	GPIB
MD0620B	RS-232C

## Specifications

Sending clock signal	Internal clock signal (ST1, ASYNC, ST/SP)*1	Clock: 50 to 20 kbit/s in 5 bit/s steps, 20 k to 400 kbit/s in 100 bit/s steps 512 k, 576 k, 672 k, 768 k, 1024 k, 1152 k, 1344 k, 1536 k, 1920 k, 2048 k, 4096 k, 8192 kbit/s Accuracy Self oscillation: $\pm 5$ ppm Slave oscillation: Subject to 8 kbit/s or 8 kbit/s of (64 k + 8 k) external input or receiving data Slave oscillation range: $\geq \pm 100$ ppm
	External input	Operated by the external input clock signal (TTL level or sine waves)
	External clock signal (ST2, RT)	Clock (inversion can be used.) by each 50 bit/s to 10 Mbit/s interface
Receiving clock signal	External clock signal (RT)	Clock (inversion can be used.) by each 50 bit/s to 10 Mbit/s interface
	Internal clock signal (ASYNC, ST/SP)	50, 70, 100, 150, 200, 256, 300, 400, 500, 512, 600, 768, 800, 1 k, 1.2 k, 1.6 k, 1.8 k, 2 k, 2.4 k, 2.56 k, 3 k, 3.6 k, 4.8 k, 7.2 k, 9.6 k, 14.4 k, 19.2 kbit/s
Pattern	Code	A, Z, 1:1, 3:1, 1:3, 7:1, 1:7
	Programmable pattern	8 bit repetition (5 to 8 bits for ST/SP, 5 bits for 2.0 M G.704 spare bit)
	Pseudorandom pattern	$2^n - 1$ bits repetition (n: 6, 7, 9, 11, 15, 19, 20, 23), positive/negative logic
	Word pattern	8 bits x 8 k words (manual input, setting, user's pattern)
	FOX pattern	Conforms to ITU-T (EBCDIC, ASCII, EBCD, BAUDOT)
Error insertion	Manual error	Single-bit error whenever the key is pressed or single-bit error every second
	Cyclic error	$2.5 \times 10^{-1}$ to $1.7 \times 10^{-7}$ (N x $10^{-9}$ , N: 1.0, 1.1, 1.3, 1.5, 1.7, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0, 7.0, 8.0, 9.0)
Start-stop synchronization	Start-stop bit length	Start bit: 1 bit, Stop bit: 1, 1.5, and 2 bits
	Data length	5, 6, 7 and 8 bits
	Parity	None, odd, even
Error measurement	Detection error	Bit error, code error, parity error, CRC error and frame mismatch are selected.
	Measurement items	Error count, error rate, block error count, block error rate, ES, %ES, DM, %DM, SES, %SES, US, %US, EFS, %EFS, AT, %AT, BBER clock slip, sync count/time, frame sync loss time, signal loss, AC power failure time
	Block length	$2^5$ to $2^{16}$ bits or $10^1$ to $10^{16}$ bits
	Measurement time	$10^2$ to $10^9$ bits measurement and repetition of 1 s to 999 hr 59 min. 59 s
	Display of measurement results	Among the measurement results, five or all optional items can be displayed simultaneously. The buzzer sounds if an error is detected (the volume can be adjusted). The lapse time after the measurement starts is displayed in units of seconds.
Pattern trace	No. of trace bytes	32 KB max.
	Traces stop trigger	Manual code detection, not code detection, signal lines ON/OFF, No. of trace bytes, external input signal ON/OFF
	Delay trace after trigger detection	10 to 8000 bytes
	Trace data display	Displays together with trace stop time in HEX, JIS8, ASCII, EBCDIC, EBCDIK, EBCD, Baudot bit (shift: +4 to -3 bits)
Voltage measurement	Measuring range: -30 to +30 V Accuracy: $\pm 5\% \pm 1$ digit	
Frequency measurement and count	Measuring range: DC to 10 MHz Accuracy: $\pm 5$ ppm $\pm 1$ digit Display: Decimal 7 digits	
Time measurement*3	Measuring range: 0 to 10 sec.(10 $\mu$ s steps) except for ASYNC and ST/SP Accuracy: $\pm 5$ ppm $\pm 1$ digit Display: Decimal 7 digits	
Signal monitor lamp	Displays the status of each signal line ("1"/"ON": green or red*2, "0"/"OFF": lamp off)	

Continued on next page

External output		Error: Negative logic, TTL level (half clock with of receiving clock) Pattern sync loss: Negative logic, TTL level Clock: Receiving gate clock, TTL level Receiving clock: TTL level (64 k + 8 k) bit/s clock: 64 kbit/s clock with 8 kbit/s violation, AMI, RZ, 1.0 V±10%, Impedance: 120 Ω Video output: Composite video signal (vertical: 16.666 ms ±100 ppm, horizontal: 63.61 μs ±100 ppm, 1 Vp-p ±10%)
External input		Clock: 50 bit/s to 9 Mbit/s, TTL (64 k + 8 k) bit/s clock: 64 kbit/s clock with 8 kbit/s violation, AMI/RZ, Input level: 0.6 to 1.1 Vp-p, Impedance: 110 Ω Trigger: TTL level
Print output	Printing in error measurement	At measurement start: Prints measurement conditions and time During measurement Print time, error count and alarm generation/recovery information at specified intervals Prints time and measurement result after start of measurement Prints time and error count at termination of each measurement cycle At measurement end: Prints time and measurement result
	Other printing	Prints measurement conditions, measurement results, and time in manual measurement
Internal timer		Year, month, day, hour, minute, second
Power		85 to 132 Vac/170 to 250 Vac (changeable), 47 to 64 Hz, ≤180 VA (with full units)
Operating temperature range		0° to +40°C
Connectable unit		5 units max.
Dimensions and mass		319 (W) x 177 (H) x 450 (D) mm, ≤10.5 kg

- \*1: Up to 20 kbit/s for ASYNC and STSP
- \*2: Denotes red LED alarm
- \*3: Can not measure delay time for async system and start-stop system

### Ordering information

Please specify model/order number, name, and quantity when ordering.

#### MD6420A (main frame)

Model/Order No.	Name
MD6420A	<b>Main frame</b> Data Transmission Analyzer
	<b>Standard accessories</b>
	Power cord, 2.6 m: 1 pc
F0013*	Fuse, 5 A: 2 pcs
F0012*	Fuse, 3.15 A: 2 pcs
B0301	Protection cover: 1 pc
Z0031A	Printer paper: 2 rolls
B0254C	Blank panel (for interface units): 5 pcs
B0254D	Blank panel (for remote control units): 1 pc
W0618AE	MD6420A operation manual: 1 copy
	<b>Options</b>
MD6420A-01	Sending pattern synchronized signal output (video output cannot be used with this option.)
MD6420A-02	Sending pattern for word memory, 32 KB
	<b>Optional accessories</b>
B0291B	Carrying case (with casters)
B0251F	Shoulder bag (for MD6420A)
B0302	Rack mount kit
B0251E	Unit housing case (accommodates 10 units)
A0006	Headset
J0386	Probe for external input (BNC-P · IC clip), 1 m
J0135	Balanced cord (I-214APS · - · M-1PS), 2 m
J0162B	Balanced cord (M-3912 · - · M-3912), 2 m
J0050B	Balanced cord [M-214S · - · M-214S (shielded)], 2 m
J0127B	Coaxial cable (BNC-P · RG-58A/U · BNC-P)
J0106	Coaxial cable (3CV-P2 · M-1P), 2 m
Z0174	Service kit for MD6420A
J0673A	Double-ended 25 pin cross cable, 3 m

\*: Supplied one kind of fuse depending on the power supply voltage specified when ordering.

#### Interface units

Model/Order No.	Name
MD0621A	V.24/V.28 (RS-232C) Interface Unit
W0595AE	<b>Standard accessory</b> MD0621A operation manual: 1 copy
	<b>Optional accessories</b>
J0387	Double-ended 25-pin connector cable, 2 m
J0388	25-pin DCE-DTE conversion adapter (used for DTE mode)
MD0621B	V.35 Interface Unit
W0596AE	<b>Standard accessory</b> MD0621B operation manual: 1 copy
	<b>Optional accessories</b>
J0864B	Double-ended 34-pin connector cable, 2 m
J0390	34-pin DCE-DTE conversion adapter (used for DTE mode)
MD0621C	V.36 (RS-449) Interface Unit
W0597AE	<b>Standard accessory</b> MD0621C operation manual: 1 copy
	<b>Optional accessory</b>
J0391	Double-ended 37-pin connector cable, 2 m
J0392	37-pin DCE-DTE conversion adapter (used for DTE mode)
MD0621D	X.20 (RS-423)/X.21 (RS-422) Interface Unit
W0598AE	<b>Standard accessory</b> MD0621D operation manual: 1 copy
	<b>Optional accessory</b>
J0393	Double-ended 15-pin connector cable, 2 m
MD0622B	G.703/G.704 1.544 Mb/s Bipolar Interface Unit
W0599AE	<b>Standard accessory</b> MD0622B operation manual: 1 copy
	<b>Optional accessories</b>
J0393	Double-ended 15-pin connector cable, 2 m
J0440	Balanced cord (CS1-MM2), 2 m
J0990	Measurement cable (D-SUB15/SBMD06FBS), 2 m
J0991	Measurement cable (D-SUB15/CLIP), 2 m
MD0622D	G.703/G.704 6.312 Mb/s Bipolar Interface Unit
W0600AE	<b>Standard accessory</b> MD0622D operation manual: 1 copy
	<b>Optional accessories</b>
J0393	Double-ended 15-pin connector cable, 2 m
J0127B	Coaxial cord (BNC-P · RG58A/U · BNC-P), 1 m

Continued on next page

Model/Order No.	Name
MD0622E	G.703 64 kb/s Interface Unit
W0601AE	<b>Standard accessory</b> MD0622E/E1 operation manual: 1 copy
J0162A	<b>Optional accessories</b> Balanced cord (M-3912 · · · M-3912), 1 m
J0162B	Balanced cord (M-3912 · · · M-3912), 2 m
J0162C	Balanced cord (M-3912 · · · M-3912), 2.5 m
J0162D	Balanced cord (M-3912 · · · M-3912), 5 m
J0537	Balanced cord (M-3912 · · · M-1PS), 2 m
J0164	Balanced cord (M-3912 · · · M-214-SP), 2 m
J0440	Balanced cord (CS1-MM2), 2 m
MD0625B	I.431 1.544 Mb/s Interface Unit
W0606AE	<b>Standard accessory</b> MD0625B operation manual: 1 copy
J0393	<b>Optional accessories</b> Double-ended 15-pin connector cable (GMP-AS12-001), 2 m
J0440	Balanced cord, CS1-MM2, 2 m
J0539	Cable with 15-pin and modular connectors, (ISO4903 · 15P-IS8877 · 8P), 3 m
J0540	Cable with 15-pin connector and screw terminals, [ISO4903 · 15P-4 screw terminals (3 mm)], 3 m
J0594	Cable with 8-pin modular connector, and alligator clip, ISO8877-8P alligator, 2 m
MD0626A	TTL Interface Unit
W0608AE	<b>Standard accessory</b> MD0626A operation manual: 1 copy
J0127B	<b>Optional accessory</b> Coaxial cable (BNC-P · RG-58A/U · BNC-P), 2 m
J0386	Probe for external input (BNC-P · IC clip), 1 m

## Extension units

Model/Order No.	Name
MD0627A	Analog Unit
W0609AE	<b>Standard accessory</b> MD0627A operation manual: 1 copy
A0006	<b>Optional accessory</b> Head set
J0135	Balanced cord (I-214APS · · · M-1PS), 2 m

## Remote control units

Model/Order No.	Name
MD0620A	GPIB Remote Control Unit (The operation is described in the MD6420A operation manual.)
J0008	<b>Optional accessory</b> GPIB cable, 2 m
MD0620B	RS-232C Remote Control Unit (The operation is described in the MD6420A operation manual.)
J0387	<b>Optional accessories</b> Double-ended 25-pin connector cable, 2 m
J0673A	Double-ended 25-pin cross cable, 3 m